

## Acoustic warning lights



*small and medium acoustic warning lights*

# BipLamp 98/LED RGB-112/LED RGB

Small and medium acoustic warning lights, made with Led RGB Technology that allows 200 times greater duration than traditional ones.

Low consumption allows the continued use even under harsh temperature.

There is the opportunity to realize all the colours available with a single model.


It's suitable for alarm, electric gates, forklifts trucks and to report the status of operation used in a single source. You can combine acoustic and light signal.



BIP LAMP 98 LED-RGB	BIP LAMP 112 LED-RGB	BIP 3 LAMP 98 LED-RGB	BIP 3 LAMP 112 LED-RGB	Nominal tension V	Average absorption W	Light source	Intermittent cycles/min	Sound level (1 meter) dB A-SPL	Acoustic frequency Hz	Service	Degree of protection IP	Range of colours LED
10.42.107 C		10.42.108 C		12 AC/DC								
	10.42.117 C		10.42.118 C		2÷5	LED RGB	120/fixed	76	2900	Continuous	53	7 (Blue, red, orange, yellow, white, violet, green)
10.43.107 C		10.43.108 C		24 AC/DC								
	10.43.117 C		10.43.118 C									

Weight:

kg. 0,170	kg. 0,220	kg. 0,170	kg. 0,220
-----------	-----------	-----------	-----------

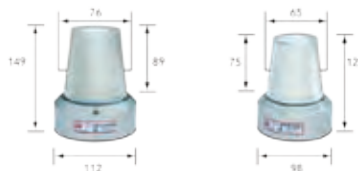

Share space in mm

small acoustic warning lights

# Sonolamp



These warning signals are able to produce visual and acoustic signal at the same time.

This special property makes them suitable in environments where the light signal can be covered or be into shade related to the operator.



So the acoustic signal is able to draw attention.

They're suitable in environments where there are some workers with sight or visual defect.

SONOLAMP 59 light + sound	SONO 59 sound	LAMP 59 light	Nominal tension V	Current mA	Average absorption W	Lamp power W	Intermittent cycles/min	Sound level (1 meter) dB A-SPL	Acoustic frequency Hz	Service	Degree of protection IP
10.42.01* C			12 AC/DC	200	2,2	2	84	90	3220	Continuous	33
		08.42.01* C		170	2		110	-	-		
10.43.01* C			24 AC/DC	100	2,2	84	93	3220			
		08.43.01* C		90	2	110	-	-			
	10.81.001 C		12÷24 AC/DC	100	1,2	-	84	90	3220		

Weight:                      kg. 0,115      kg. 0,085      kg. 0,060

\*cap colours :  
1 = red, 2 = yellow ,3 = orange, 4 = green, 5 = blue, 6 = white.



small and medium acoustic warning lights

# BipLamp 98/N-1 12/N

These acoustic warning lights emit an alternate sound (buzzer) to draw attention on a situation in effect.

They're suitable for alarm, electric gates, forklifts trucks and everywhere you'd see a situation in effect.



BIP-LAMP 98/N Filament lamp	BIP-LAMP 112/N Filament lamp	Nominal tension V	Current mA	Average absorption W	Lamp power W	Intermittent cycles/min	Sound level (1 meter) dB A-SPL	Acoustic frequency Hz	Service	Degree of protection IP
10.81.01* C	10.81.02* C	12÷24 AC/DC	1,75	10,5	21	90	76	2900	Continuous	53
10.24.01* C	10.24.00* C	48 AC	0,52	7	25	100				
10.25.01* C	10.25.00* C	125 AC	0,32	10	40	110				
10.26.01* C	10.26.00* C	230 AC	0,17	10	40	110				

Weight: kg. 0,200 kg. 0,220

\*cap colours :  
1 = red, 2 = yellow ,3 = orange, 4 = green, 5 = blue, 6 = white.

Share space in mm

